



LED Flood Light

3 YEAR
WARRANTY

 **LUMILEDS**

 **TUV Rheinland**
CERTIFIED

 **SAA**
APPROVAL

CE

RoHS

CB

IP65

IK10

Function& Features

1. Fin style heatsink design makes the heat dissipation perfect and extend lamp's lifespan.

2. High quality tempered glass lens: safe and extremely high light transmittance.



3. The adjustable bracket, 120° adjustable, adjust as you want.

4. Using ultra-bright highest level SMD3030 LED chips with proprietary encapsulation technology, realizing excellent luminance, low brightness decline.

5. Stainless steel waterproof plug. Engineering injection molding junction, with dust, waterproof, anti-corrosion, insulation, impact resistance and other characteristics.

6. Lighter weight, smaller size, ultra-thin dish shape design, unique, decent and fashionable, small volume can save much the shipping cost.

7. Adopting high voltage and constant current driver technology makes long lifespan.




Technical Parameters



Model No.	BSTG02R-D10	BSTG02R-D20	BSTG02R-D30
Nominal Wattage	10W	20W	30W
Input Voltage	AC90-135V/180-265V 50/60Hz		
CCT	3000K / 4000K / 5000K / 5700K / 6500K		
CRI	75±5	75±5	75±5
PF	>0.95	>0.95	>0.95
Operating Temperature	-40°C ~ 65°C		
Luminaire Efficacy	>100lm/W	>100lm/W	>100lm/W

Model No.	BSTG02R-D50	BSTG02R-D100	BSTG02R-D150	BSTG02R-D200
Nominal Wattage	50W	100W	150W	200W
Input Voltage	AC90-135V/180-265V 50/60Hz			
CCT	3000K / 4000K / 5000K / 5700K / 6500K			
CRI	75±5	75±5	75±5	75±5
PF	>0.95	>0.95	>0.95	>0.95
Operating Temperature	-40°C ~ 65°C			
Luminaire Efficacy	>100lm/W	>100lm/W	>100lm/W	>100lm/W


Product Size

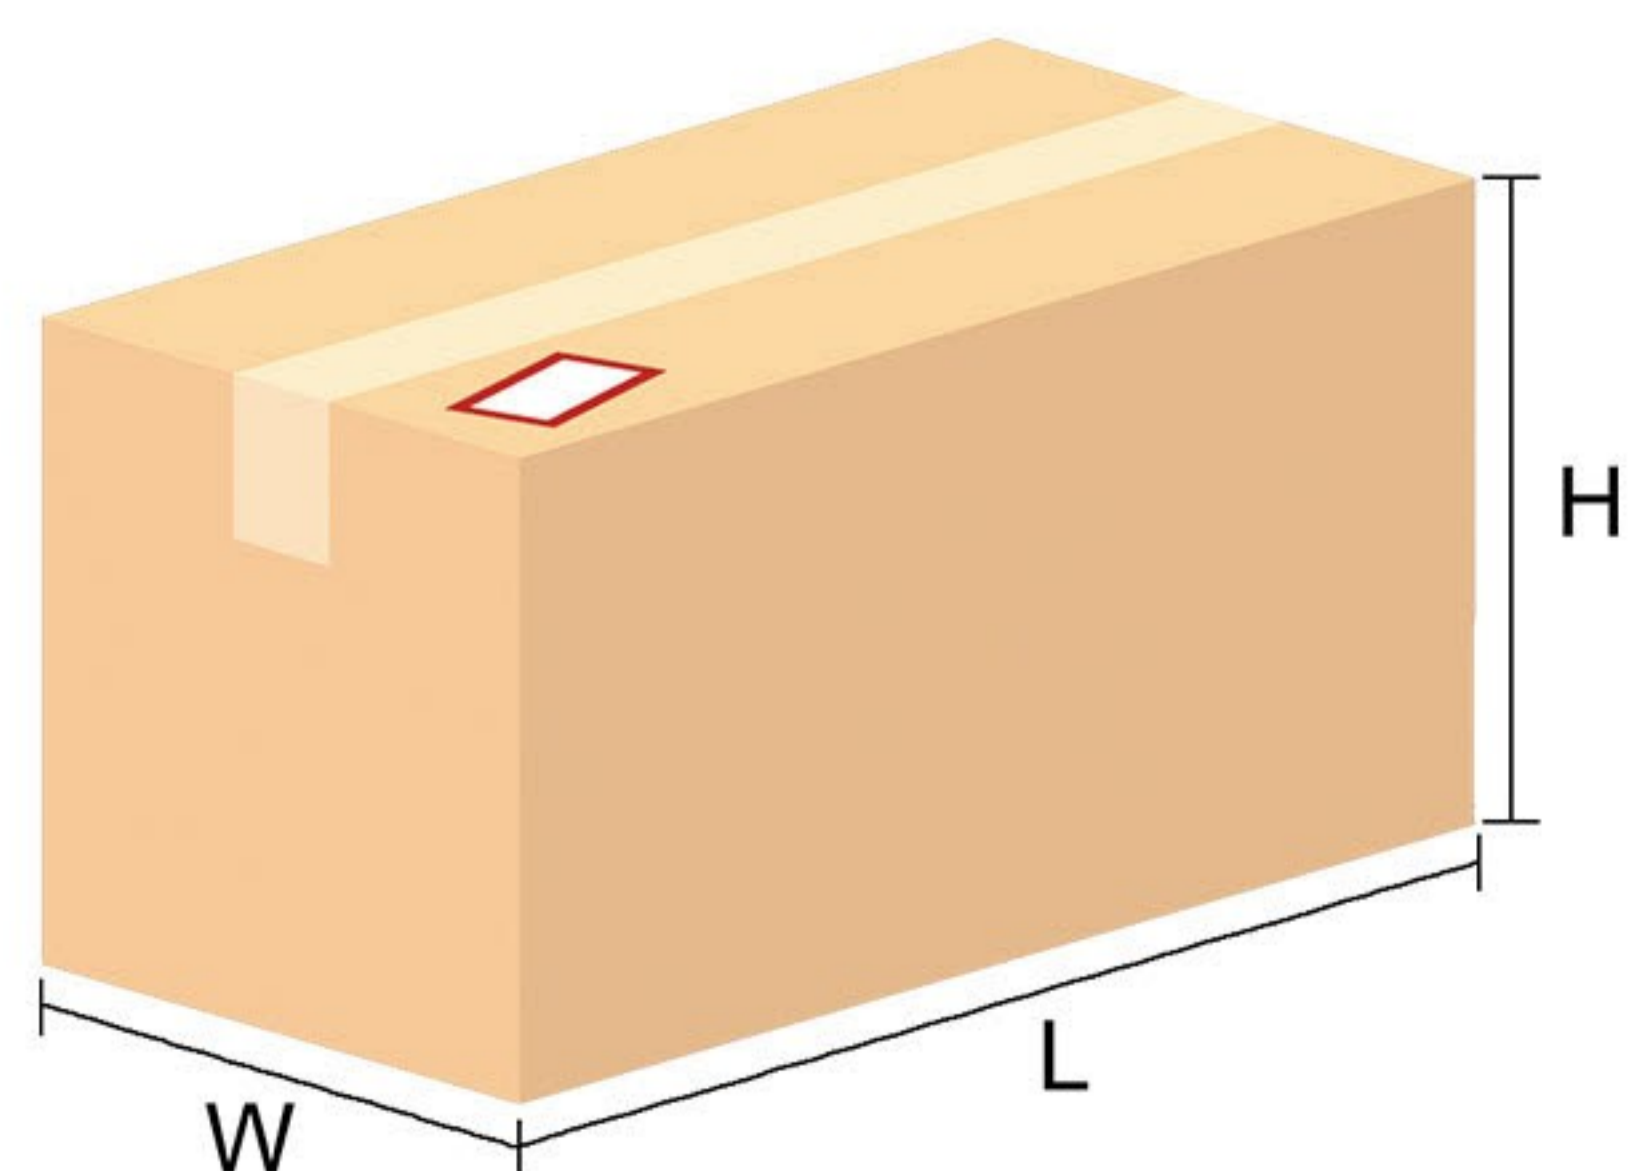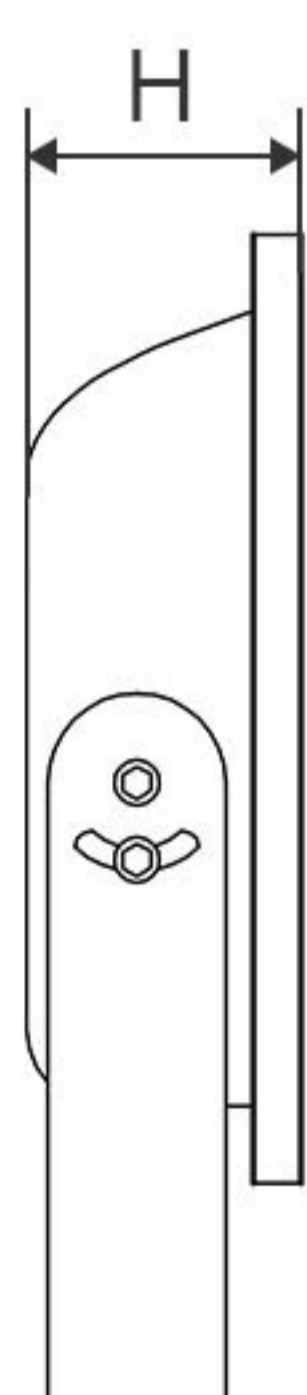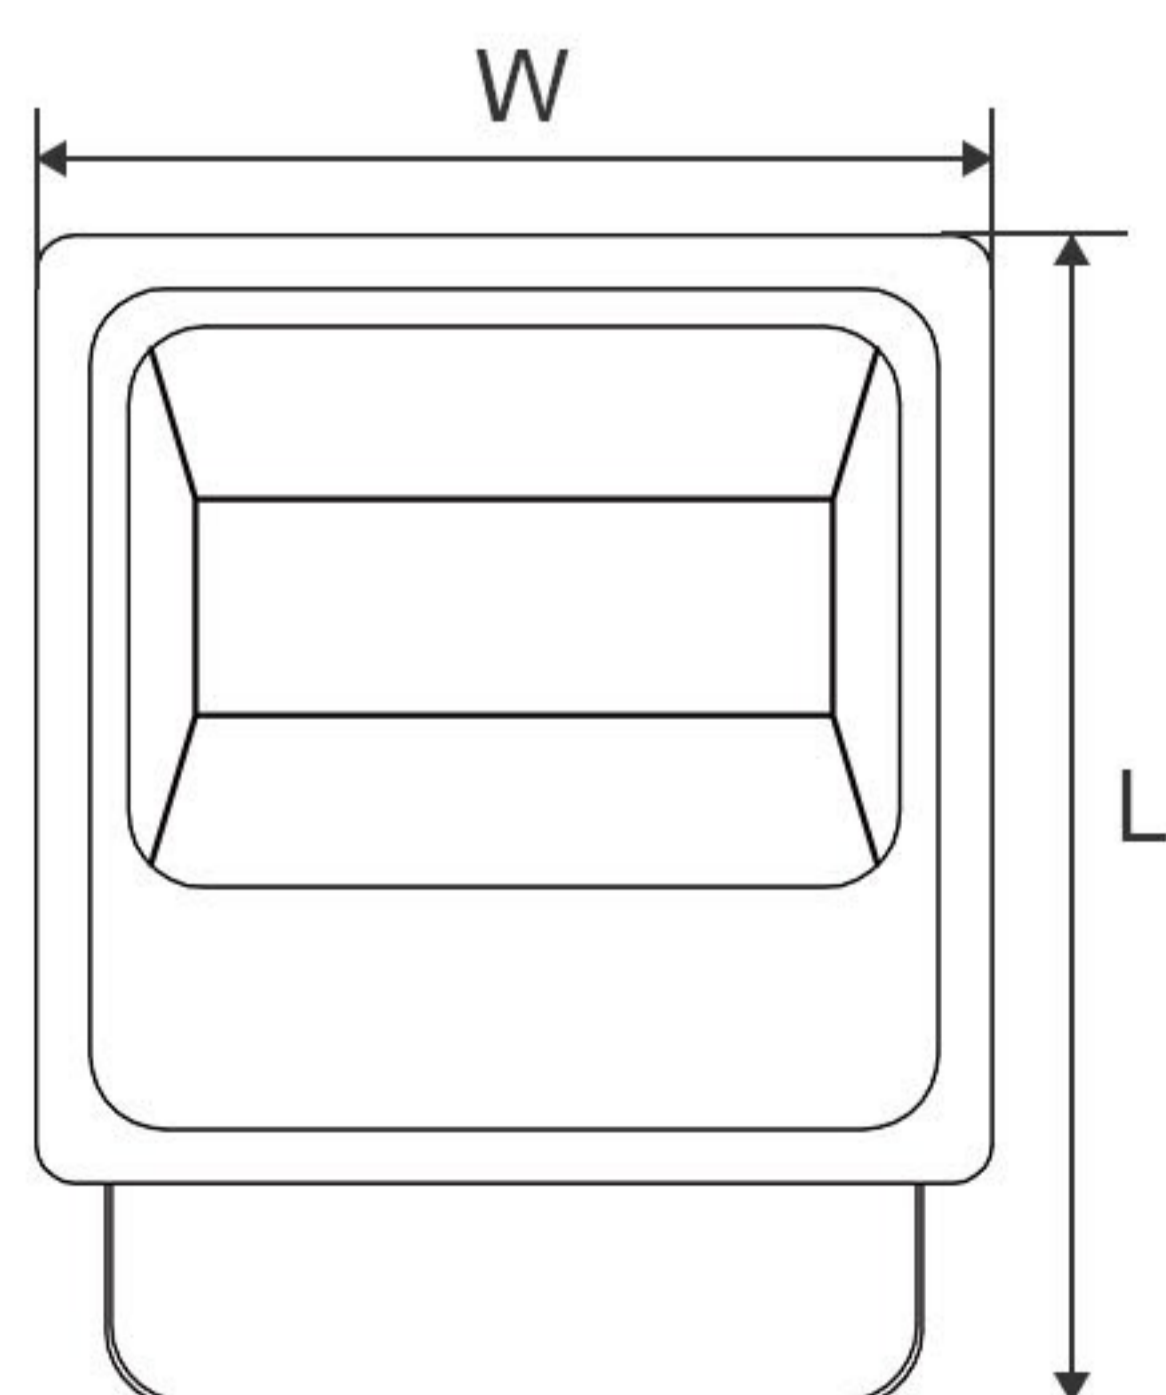

MODEL	BSTG02R-D10	BSTG02R-D20	BSTG02R-D30	BSTG02R-D50	BSTG02R-D100	BSTG02R-D150	BSTG02R-D200
Product Size(L*W*H)	163*132*47	212*184*59	241*197*57	286*227*65	326*285*81	400*347*87	400*347*87
Packing Size(L*W*H)	305 x 295 x 355 20PCS	405 x 370 x 470 20PCS	425 x 445 x 255 12PCS	485 x 395 x 310 10PCS	310 x 565 x 355 6PCS	410 x 425 x 370 4PCS	410 x 425 x 370 4PCS
N.W./CTN	8.8kg	16kg	12kg	14.8kg	18kg	17.5kg	18.5kg
G.W./CTN	10.3kg	17.5kg	13.5kg	16.3kg	19.5kg	19kg	20kg

Application Scenes

General lighting for advertising board, building, courtyard, garden, square, dock, tunnel, bridge and some other outdoor places where need lighting and decoration.

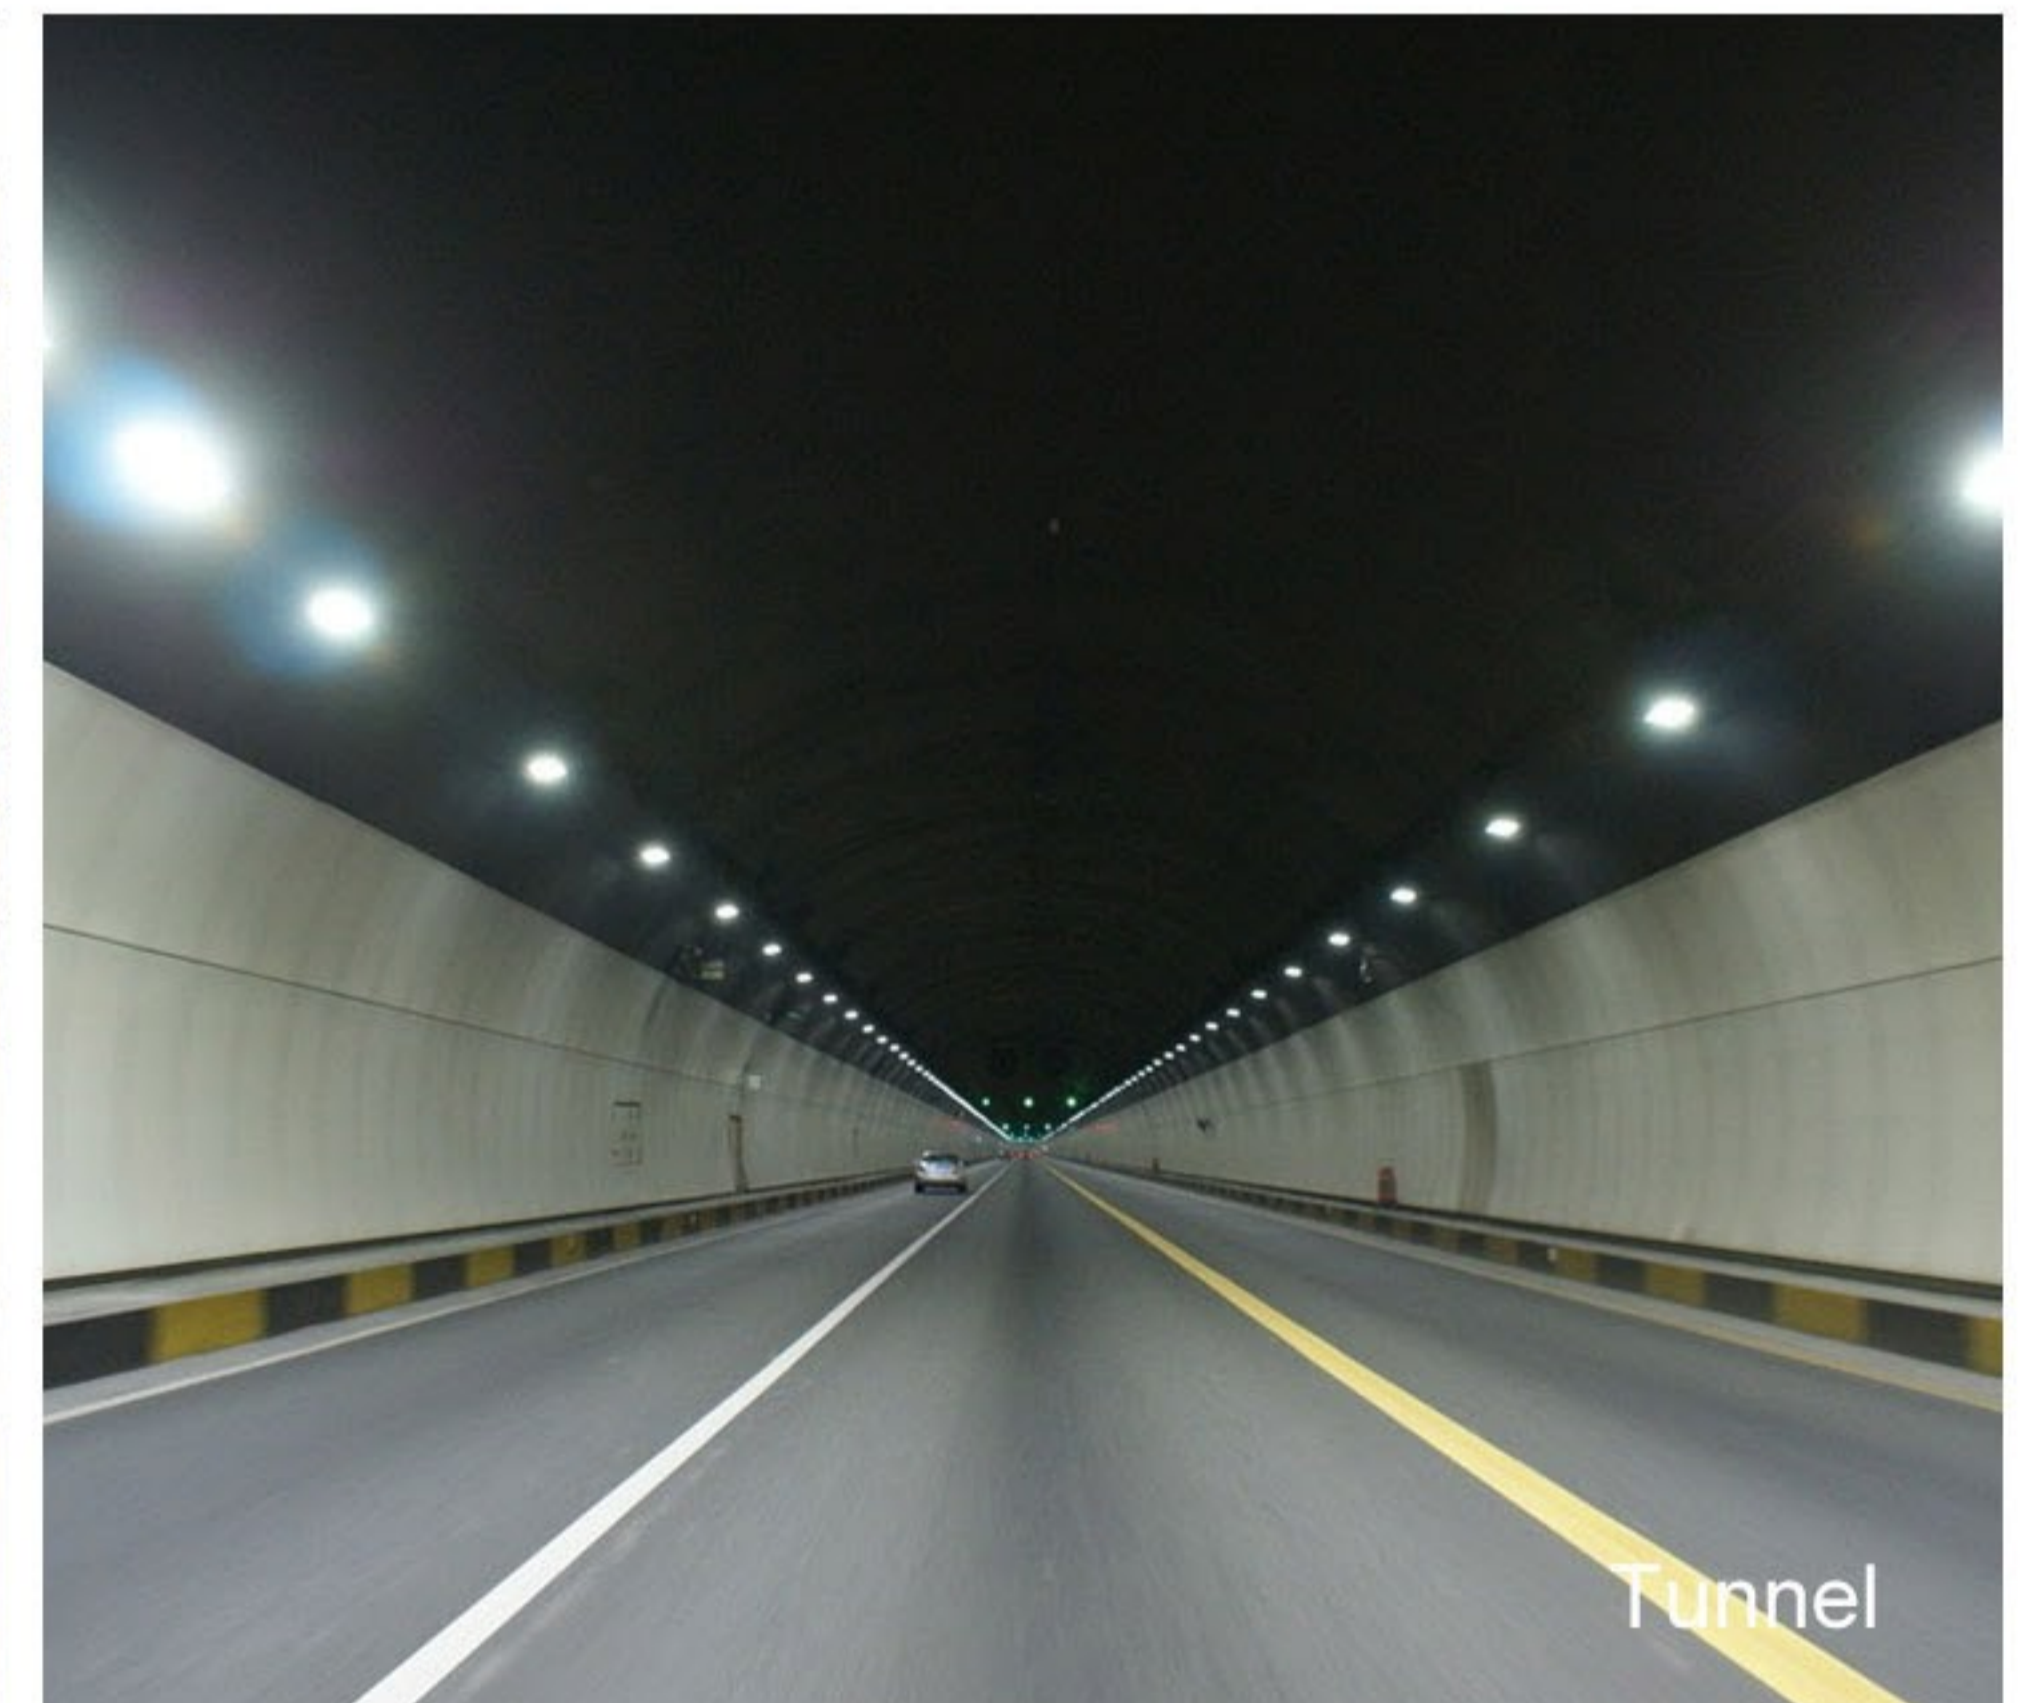

Zhejiang Boshang Optoelectronic Co.,Ltd.

Add:Hezhuang Industrial Zone,Xiaoshan District, Hangzhou City,Zhejiang Province,China.

BOPIN[®]
OPTOELECTRONIC